



Wall-mounting Bracket

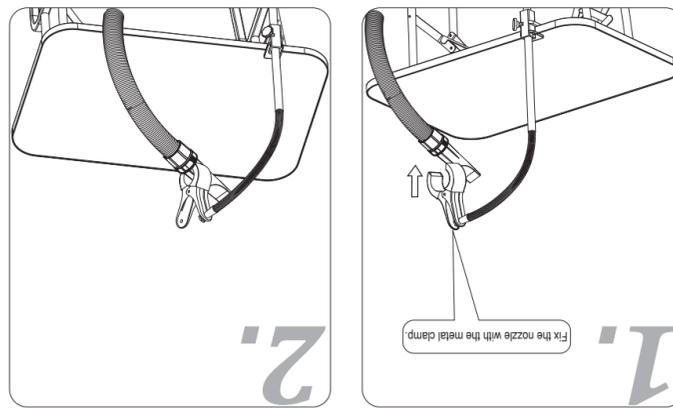


Groomers Third Arm

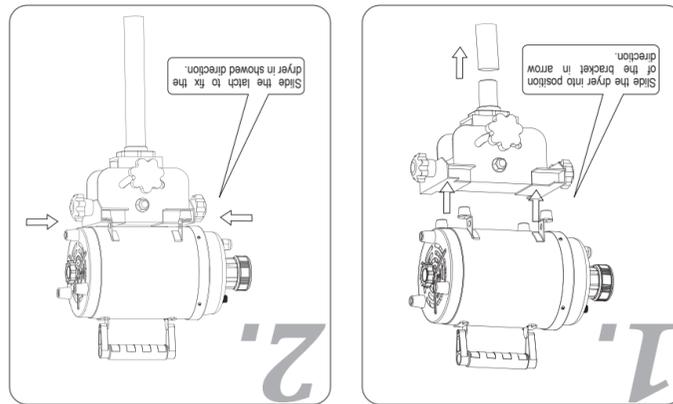

Dryer Stand

※ The power supply must be cut off before changing carbon brushes.

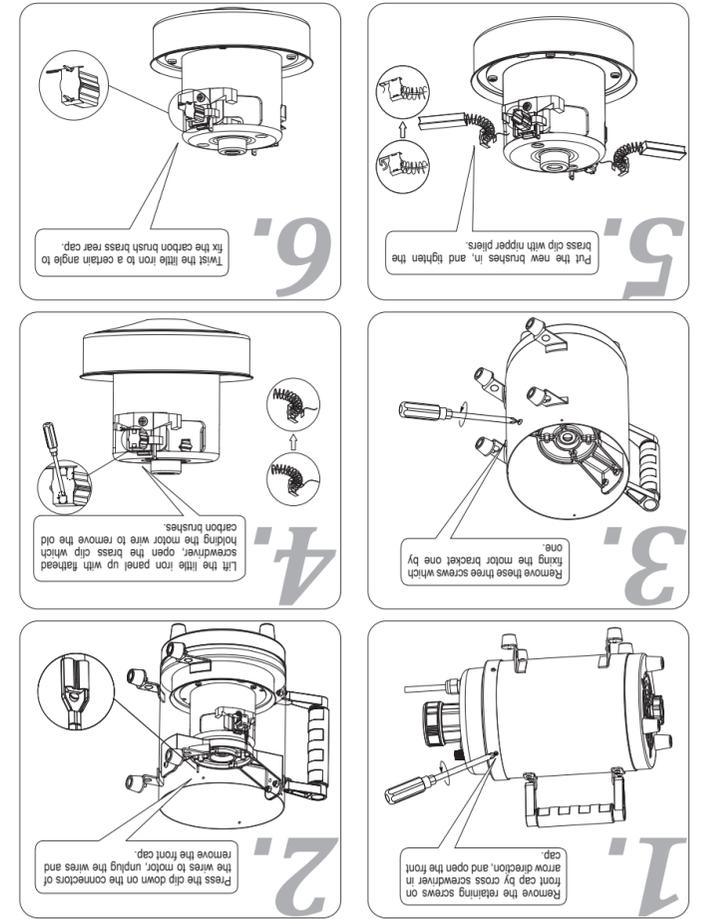

Carbon Brush



AEOLUS

Professional Pet Drying Equipments Supplier

A dryer we have nothing else to entitle but **MONSTER**



MONSTER

H-901GT/TD-901GT

Distributor Contacts

Producer : Shanghai Tongzhuo Trading Co., Ltd. (TOEX)
Address : Floor 5, Building 6, No.675 Zhujin Road, Songjiang District, Shanghai, 201615, China

Manufacturer : Yuyao Tongzhuo Electric Appliance Manufacturing Co., Ltd.
Address : No. 20 Zhu Shan Qiao Industrial Zone, Yuyao, Ningbo, China

Tested according to: IEC 60335 2 23:2003 (5. edition) (incl. Corr.2:2008) + A1:2008
IEC 60335 1:2001 (4. edition) (incl. Corr.1:2002) +A1:2004 (incl. Corr.1:2005)+
A2:2006 (incl. Corr.1:2006)
And Japanese deviation

Owner's Guide

H-901GT/TD-901GT Presented by AEOLUS


AEOLUS

PET DRYER

A New Legend
Extraordinary Blow Force
Outstanding Durability and Sturdiness
Long Lasting Carbon Brush & Motor
Unbeatable Single Motor Dryer
Superb Noise Control Technique

Pro for Pros

Structure Chart

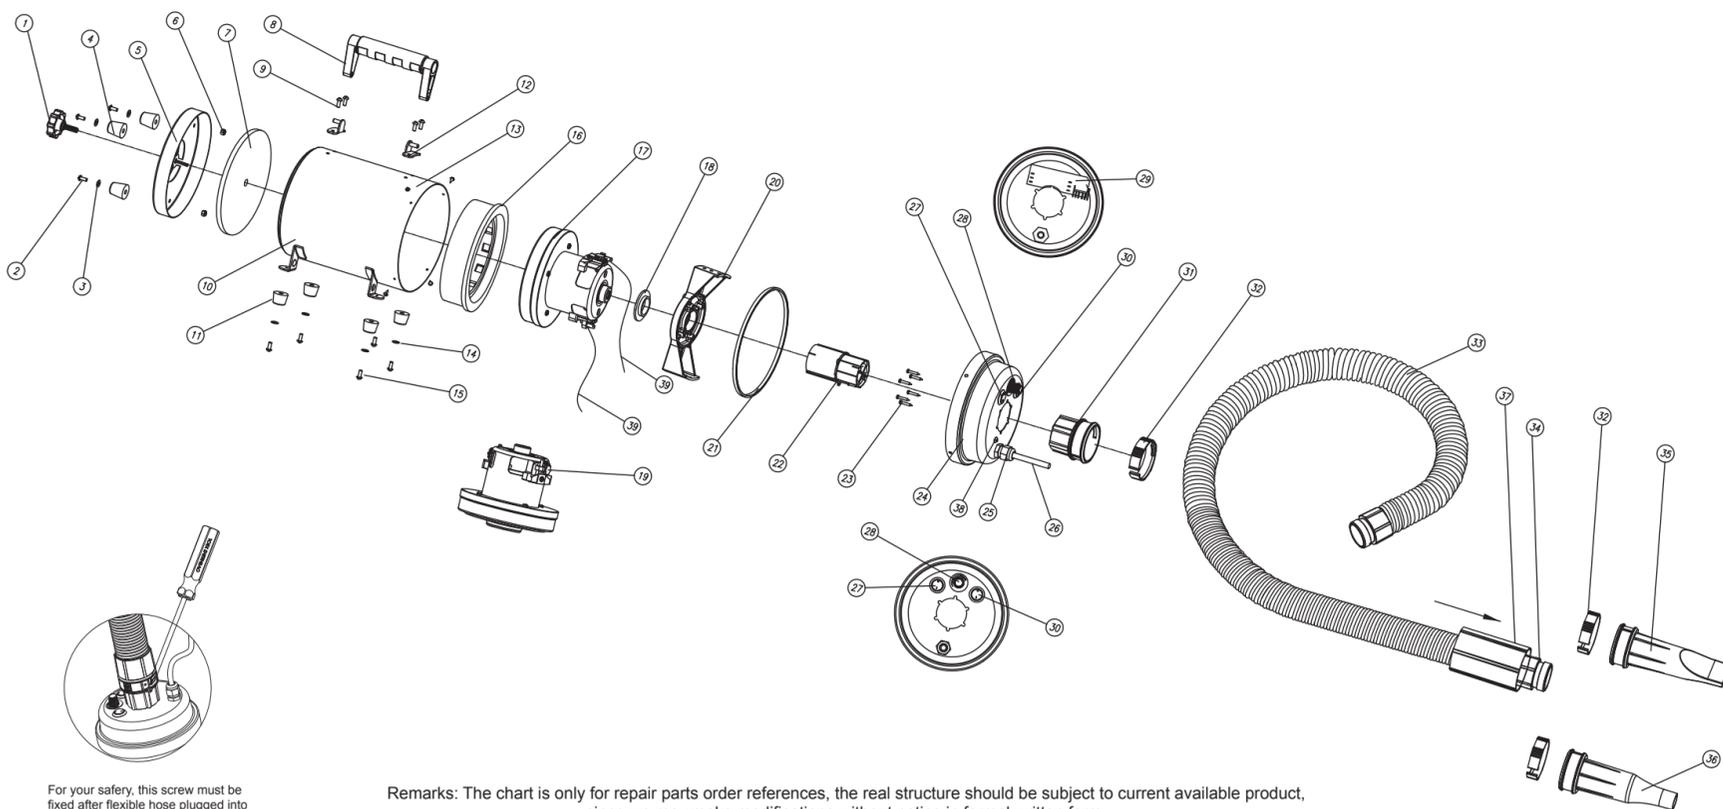

For your safety, this screw must be fixed after flexible hose plugged into the connector on front cap.

Remarks: The chart is only for repair parts order references, the real structure should be subject to current available product, since we may make modifications without notice in formal written form.

Serial No.	Item No.	Part Name	Quantity
1	TD-90001	Rear Cap Fixture Knob	1
2	TD-90002	M4×10 Screw	3
3	TD-90003	Washer	3
4	TD-90004	Rear Cap Rubber Foot	3
5	TD-90005	Rear Cap	1
6	TD-90006	M4 Lock Nut	3
7	TD-90007	Foam Filter	1
8	TD-90008	Handle	1
9	TD-90009	M4×12 Screw and Nut	5
10	TD-90010	Short Housing	1
11	TD-90011	Housing Rubber Foot	4
12	TD-90012	Handle Set	2
13	TD-90013	PA3×10 Self-tapping Screw	4
14	TD-90014	Washer	4
15	TD-90015	M5×10 Screw	4
16	TD-90016	Vibration Absorber Ring (for Motor-B)	1
17	TD-90017	Motor (B-220V/110V)	1
18	TD-90018	Rubber Washer	1
19	TD-90019	Carbon Brush	2
20	TD-90020	Single Motor Fixture Bracket	1
21	TD-90021	Rubber Seal	1
22	TD-90022	Heating Element Assembly (220V/110V) (Not installed in 100V model.)	1
23	TD-90023	PA3×16 Self-tapping Screw	6
24	TD-90024	Front Cap -A	1
25	TD-90025	PG-9 Waterproof Cable Connector	1
26	TD-90026	Power Cable	1
27	TD-90027	Heating Switch (Not installed in 100V model.)	1
28	TD-90028	Wind Speed Knob	1
29	TD-90053	PCB-C (220V/110V)	1
29	TD-90054	PCB-D (100V)	1
30	TD-90030	Power Switch	1
31	TD-90031	Front Cap D52 Hose Connector	1
32	TD-90032	D52 Nylon Clip	3
33	TD-90033	D52 Flexible Hose	1
34	TD-90034	D52 Hose Connector	2
35	TD-90035	D52 Narrow Nozzle	1
36	TD-90036	D52 Round Nozzle	1
37	TD-90055	D52 Heat Insulation Sleeve	1
38	TD-90065	M4×8 screw and nut	1
39	TD-90066	High temperature resistant silicone wire -A Brown, 0.75mm×200mm -B Blue, 0.75mm×200mm	1

A dryer we have nothing else to entitle but MONSTER

Parameters

Circuit Diagram (for H-901GT/TD-901GT)

There was a big gap between single motor and double motor dryers from wind speed and blow force, that's also the reason for most manufacturers to invent dual motor dryers for improving blow force dramatically. Like our H-901T Cyclone single motor dryer, also one of the most powerful single motor dryers in the world for quite a while, is weaker than our H-900XT Hercules double motor dryer by 350g from blow force, 955g for Hercules and 605g for Cyclone.

After we had spent a couple of years of continuous upgrading single motor dryer function until the beginning of 2012, we created a super powerful single motor dryer which can even match Hercules from both wind speed and blow force.

That situation brought our talented engineers into deep confusion; they really did not how to entitle this tremendous dryer with ordinary thinking.

At last, they got no choice but giving this creation a quite vivid name to describe its incredible outstanding performance and express their own understanding towards it, the MONSTER.

Super Blow Force

895g^①, as an unbelievable super blow force, is what Monster has archived and never touched by any other single motor pet dryer in the last whole century from the very beginning of this industry. It's building a new monument for all single motor dryers since they have never been so close to dual motor bigger brothers.

Actually, most dual motor dryers in the market perform at the average level of 780 -850g blow force, which to say Monster has already beaten them and just a bit weaker than our own double motor dryer Hercules (H-900XT).

90m/s^② is also a new world record in this filed, waiting to be challenged by any competitors' similar models.

Better Mobility

Rather than carrying a big dryer heavier than 6kg (even more), this 4.7kg portable single dryer is the ideal choice for all the works require good mobility. Also more stands and accessories available for this single motor dryer than double ones, to get your hands free and be great help for your works.

Motor Life Span

Although the carbon brush is not as long as Cyclone does of 38mm, just normal 32mm, we have enlarged the section area of the carbon brush on Monster's motor, which can also extend the lifespan by over 20%. This bigger motor with stronger torque and slower rotation speed generates much bigger wind volume than normal motors do; and extend its own life by rotating less based on same useful work.

Maintenance

If you compare Monster with a dual motor dryer, you will find you are saving labor cost, time and money on the maintenance of Monster. Just one pair of carbon brush need to be changed after about 800 hour's service than 2 pairs. Much Simpler internal structure and less wirings make you spend only 1/3 time of changing 2 pairs of brushes for a double dryer to change one for Monster.

Noise Control

As the best of best single motor dryer in the world, although coming with an aggressive name, Monster has a very quiet performance oppositely, out of imagination of most users. It's only 79dbA when noise dosimeter is positioned above Monster by 1 meter and 86dbA behind the dryer by 0.5m, probably the best detecting result based on same wind speed and blow force.

Safety Performance

The USA produced temperature switch, cuts the heating element of the H-901GT in 25ms, and begins working again after the core temperature of the heating element reduces to 85 degrees, Celsius, which allows the H-901GT to perform at an output temperature of a maximum of 52 degrees Celsius^③. H-901GT offers, high temperature resistant silicone wires, high temperature resistant switch and circuit boards, and emergency cut off switch for an overheated motor, and durable grounded wires allow for the safest usage performance on the market.

Ease of Use

AEOLUS H-901GT has patented an easy use nozzle attachment which allows the operator to remove the nozzle head with the use of just one finger, with a simple click of the attachment. Aeolus H-901GT patented nozzle allows reattachment of nozzle head with just one click.

Accessories

AEOLUS H-901GT has designed multiple items for dual purpose use of the machine:

- Wall mounting bracket
 - Groomers' third arm
 - Dryer Stand
- Please check instruction manual for further details

Testing Condition:

All testing results are under condition of 220V-50Hz, using 2800W model.
 1)2.5m long flexible hose, Φ16mm round nozzle, fixed above the high precision electronic scale at 220mm, record the blow force indication.
 2)2.5m long flexible hose, Φ16mm round nozzle, fixed at the distance of 180mm to the center of wind cup, record the wind speed indication.
 3)52℃ means the sensor fixed at the position of 3cm away from the end of round nozzle never takes a value higher than 52℃ in a 3 hours continuous testing, when the environmental temperature is at 32℃.
 Remarks: all the testing is executed on professional testing platforms.

Direction for Use

- 1.Plug the flexible hose to the front cap connector.
- 2.Plug in socket with right voltage, switch power on.
- 3.Adjust wind speed, turn on or off the heating switch and choose suitable nozzle according to your need.
- 4.Turn the wind speed knob back to Minimum, turn off the heating switch and then turn off the power switch after usage
- 5.Unplug the dryer from the mains, unplug the hose and nozzle, and put the machine and accessories back to box.

Maintenance

1. Please clean the sponge filter by washing or air blowing, be sure to fix the filter again when it's dry.
2. Keep the surface clean and dry, and use a dry and soft cloth to clean the painted surface.
3. Wet cloth with neutral detergent and wipe to remove stubborn stains and dirt.
4. Use only mild neutral detergent.
5. When the carbon brushes run out, please renew the brushes following the guide line in this booklet or consult with the professionals.

Correct Disposal of this product


This marking indicates that this product should not be disposed with other household wastes throughout the EU. To prevent possible harm to the environment or human health from uncontrolled waste disposal, recycle it responsibly to promote the sustainable reuse of material resources. To return your used device, please use the return and collection systems or contact the retailer where the product was purchased. They can take this product for environmental safe recycling.



Product Name	Monster Blaster	Item Number	H-901GT	TD-901GT
Rated Voltage	220V-240V 50Hz	110V-120V 60Hz	100V 60Hz	Blow Force
Rated Current	12.7A (220V)	19.1A (110V)	15A (100V)	895g
Maximum Power	2800W (220V)	2100W (110V)	1500W (100V)	726g
Heating Power	600W	—	—	Maximum Wind Speed ^①
Maximum Temperature (Environmental Temperature at 32℃)	52℃	—	—	90m/s
Net Weight	4.75kg	4.1kg	—	73m/s
Gross Weight	5.5kg	4.9kg	—	Minimum Wind Speed
Class	0	—	—	27m/s
				Heating Power
				79dbA
				78dbA
				Maximum Temperature (on top of the dryer at 0.5m)
				86dbA
				85dbA
				Product Dimension (Flexible Hose not included)
				340×160×210mm
				Packing Dimension (L×W×H)
				450×300×240mm

Remarks:

- ①. We cannot find any anemoscope to measure the real wind speed of this H-901GT/TD-901GT dryer, between the another single motor dryer CYCLONE in our line and H-901GT/TD-901GT.
- ②. The parameters are tested with 2.5m long flexible hose and Φ16mm round nozzle.
- ③. We may not publish formal notice in written form when the parameters changed after new improvements.
- ④. The manufacturing standards and testing stands subject to TOEX company standard: TXPS-ALPD-0901(T)-2012.

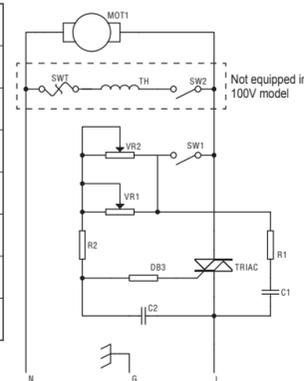

Safety Instruction

1. Pet dryer needs a single outlet which is at least 10A and has ground wire for itself. Please connect pet dryer with a correct outlet and do not share with other appliances.
2. Before switch on or turn off the power every time, please adjust the wind and temperature to the lowest, this can extend the lifetime of the machine.
3. Do not insert pins or any metal things into the clearance of the machine, otherwise that would be easy to get an electric shock and short circuit.
4. Do not use a cloth or bag to stop the diffuser or foam filter; otherwise it would damage the machine.
5. If the machine has been used for some time and a malfunction occurs, you must ask the professional person to repair it. Do not disassemble by yourself.
6. If the power cord is damaged, discontinue use and have repaired by a professional.
7. Please keep children away when you operate the machine.
8. Do not hit the housing with fierce shock or drop the machine from high, which will damage the frame and motor.
9. Cardiopath or people with pacemaker are forbidden to use this machine.
10. Please hold the nozzle and hose firmly before turning the machine on, or the hose may wiggle and cause injury.
11. Must plug hose into the front cap connector before turning the machine on.
12. It's strictly forbidden to touch the components in the front cap connector with hand or any other objects in any situation.
13. Appliance is not intended for use by persons (including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
14. Children should be supervised to ensure that they do not play with the appliance.
15. If the supply cord is damaged, it must be replaced by the manufacturer or its service agent or a similarly qualified person in order to avoid a hazard.